

BODPAVE 40

PRODUCT DESCRIPTION


BodPave 40 grass pavers are an interlocking cellular paving grid system for grass and ground reinforcement applications where there is regular pedestrian or vehicle use. BodPave 40 permeable paving grids can be installed with either a grass or gravel filled surface and allow full rainwater penetration. Manufactured from UV stabilised 100% recycled HDPE, in black or green, BodPave 40 plastic pavers are strong, chemically inert & non-toxic, enabling them to provide a durable, safe & sustainable eco-friendly surface for trafficked areas.



CHARACTERISTICS	
LOAD-BEARING CAPACITY (FILLED)	150 t/m ²
CONNECTION TYPE	EDGE SPIKE & LOOP
BASAL SUPPORT & ANTI SHEAR	FOUR 25mm LONG SPIKES PER PAVER
DIMENSIONS	500mmX 500mm X 40mm DEEP PLUS 25mm LONG SPIKES
CELL WALL THICKNESS	2,7mm - 3,2mm
NOMINAL INTERNAL CELL DIMENSIONS	60mm OCTAGONAL
% OPEN CELL	95% (TOP) / 75% (BASE)
QUANTITY PER m ²	4 PAVERS
WEIGHT	1.2KG (4,8kg/m ²)
POLYMER	RECYCLED POLYETHYLENE
COLOUR	BLACK/GREEN*
CHEMICAL RESISTANCE	EXCELLENT
UV RESISTANCE	HIGH
TOXICITY	NON TOXIC

*Please note that when using recycled HDPE it is difficult to maintain consistency across single green pavers, and from one green paver to another.

1. TCS Geotechnics is a trading name of Technical Civils Solutions Ltd
2. TCS Geotechnics Ltd reserves the right to alter product specifications without prior notice.
3. It is the responsibility of all users to satisfy themselves that the above data is current.
4. The above figures are average values obtained from testing to current EN ISO standards
5. TCS Ltd cannot accept responsibility for the performance of these products as the conditions of use are beyond our control.
6. Installation details are available on request.

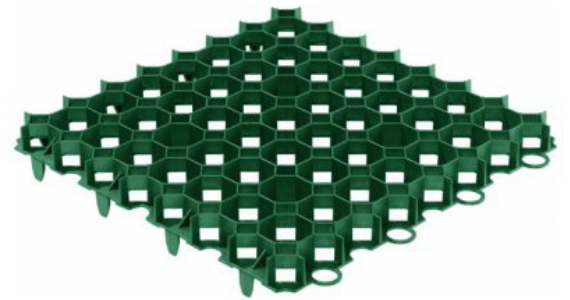

REGISTERED OFFICE ADDRESS

Units 2 & 5 Tetbury Close
Martland Industrial Park
Wigan
Greater Manchester
WN5 0LA

